



CC ASIAN
CONCRETO
BEAUTIFY YOUR WAY

ASIAN TACTILE

— Detectable Warning Tiles —

ASIAN TACTILE

Detectable Warning Tiles

Robust. Seamless. Matchless.

Asian Tactiles have robust ridges and dots to guide the visually impaired safely to their desired destination. The tiles assist in giving directional guide to people walking or in wheel chairs. Following international standards, Asian Tactiles are primarily manufactured in yellow color and are used in diverse applications.

Special Features:

- Manufactured in 100% Automated Plant with technology from Germany
- First rate material
- Seamless fitting
- Available in Ridge and Dot designs

Where to be used:


Walkways | Patios | Parks | Bus Stops | Hospitals | Government Buildings | Housing Colonies

Colour Range:



Yellow Customized

Patterns:

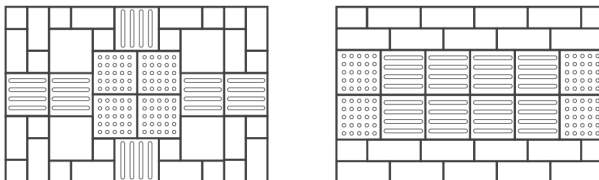

Ridge Design



Dot Design



Specifications:

Parameters	Dimensions
Length (mm)	400
Breadth (mm)	400
Thickness (mm)	40 / 60
Tiles/m ²	6.25
Tiles/ft ²	0.58
Wet Transverse Strength (N/mm ²)	≥ 40 / ≥ 45

Load Factor:



ASIAN CONCRETO PVT. LTD.



INDIA SALES OFFICE:
Plot No. 84, Palm Paradise, Ramgarh Taal, Gorakhpur, UP, India
Phone: +91-8127585858

NEPAL SALES OFFICE:
1st Floor, ShriPri Home, Kalikasthan - 29, Kathmandu, Nepal
Phone: +977-9802711199

FACTORY:
Ramgram - 16, Nawalparasi, Nepal.
Phone: +977-9802711199

Email: info@asianconcreto.com
Website: www.asianconcreto.com
Follow us on [f](#) [i](#) [t](#) [i](#)
Asian Concreto Pvt. Ltd.

Technical Specification of Concrete Flooring Tiles

Product : Tactile (400x400x40)mm

S.No.	Description	Asian Concreto	Standard References
			ASTM C 1731, BS 5385
1	Dimension of Specimen		
	Length mm	400	As per Actual
	Width mm	400	As per Actual
	Thickness mm	40	As per Actual
	Arris/ Chamfer mm	7.2	Min 5, Max 7
	Flatness mm	Nil	1mm
	Straightness	Nil	1% of Length
	Thickness of Wearing Layer mm	> 6	Minimum 6mm
2	Dimension Tolerance		
	Length mm	± 1mm	± 1mm
	Width mm	± 1mm	± 1mm
	Thickness mm	± 1mm	± 5mm
	Arris/ Chamfer mm	(+) 0.2mm	± 1mm
	Thickness of Wearing Layer mm	(+) 2mm	(+) 2mm
3	Surface Area of Tile	1600	As per Actual
	cm ²		
4	Volume of Specimen	6400	As per Actual
	cm ³		
5	Minimum Compressive Strength N/mm²	≥ 30	25 N/mm ²
	28 Days		
6	Water Absorption	< 6%	Maximum 10%
	(%)		
7	Dry Density	2250	2250 kg/m ³ , ± 50 kg/m ³
	kg/m ³		
8	Abrasion Resistance	< 2mm	Maximum 2.5mm
	mm		
9	Face Layer Pigment (Color)	Synthetic or Natural	Synthetic or Neutral (Zinc compound or organic dyes or Lead pigments shall not be used)
10	Label and Marking		
	Concrete tile package shall be marked with the following information suitably:		
	a) Identification of the manufacturer,		
	b) Grade of concrete tiles, and		
	c) Date of manufacture.		
Note: The product should be adequately packed to identify above and also ensure products from manufacturer facility to the buyer facility during loading transport, unloading do not suffer any physical damage including chipping, cracking, deform or any other damage from actual product specifications			